




## flexDUCT™ 150 (150 CL)

### Lightweight blower and ducting hose

*A versatile solution for light-duty applications. Flexible and lightweight, it features an external helix for easy drag and a smooth bore for precise flow. Ideal for general ducting needs, including ventilation, handling grass clippings, leaves, dust, and fumes.*

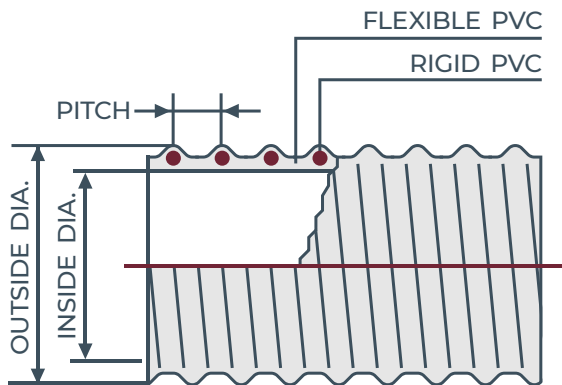

#### FEATURES

Flexible and lightweight. External helix provides easy drag. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions.

#### APPLICATIONS

Light-duty general ducting for ventilation and grass clippings, leaves, dust and fumes.

#### CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

#### TEMP. RANGE

-13°F to 140°F

#### NOTE

Not a food-grade hose

### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
2-1/2	2.81	0.55	2.5	6	—	0.37	50,100
3	3.37	0.59	3.0	6	—	0.54	50,100
4	4.41	0.61	4.0	5	—	0.71	50,100
5	5.55	0.80	5.0	3	—	1.00	50,100
6	6.51	0.80	6.0	3	—	1.29	50,100
7	7.54	0.85	7.0	2	—	1.38	50,100
8	8.55	0.85	8.0	2	—	1.71	50

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*