




flexDUCT™ 155 (155 GY)

Heavy-duty blower and ducting hose

A reliable solution for the collection of grass, leaves, dust, and fumes. Clear sidewall for visual inspection, smooth bore for precise flow, and easy drag with an external helix.

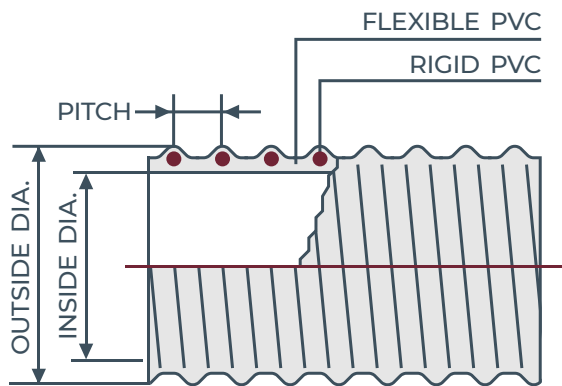

FEATURES

Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability. External helix provides for easy drag.

APPLICATIONS

Heavy-duty blower and ducting hose for collection of grass, leaves, dust, and fumes

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

TEMP. RANGE

-13°F to 140°F

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/2	1.79	0.35	1.5	20	20.0	0.26	100
2	2.31	0.39	2.5	15	18.0	0.39	100
2-1/2	2.85	0.54	3.0	15	15.0	0.44	100
3	3.39	0.56	3.5	15	15.0	0.70	100
4	4.60	0.65	4.5	15	15.0	1.43	100
5	5.52	0.87	8.8	12	12.0	1.87	100
6	6.52	0.87	9.0	11	10.0	2.32	100
8	8.85	0.91	14.0	10	9.0	4.03	50

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*