



## flexDUCT™ 620 (620 WD)

### General ducting and blower hose

A versatile solution rated to 220°F. Combining abrasion resistance with flexibility, it's ideal for lightweight abrasives like sawdust, grass clippings, street refuse, and cotton pickers. Constructed with EPDM rubber, a metal wire helix, a smooth bore, and a slightly corrugated outer diameter.

#### FEATURES

Rated to 220°F. Abrasion resistant yet very flexible. 100% rubber sidewall (no fabric).

#### APPLICATIONS


For use with lightweight abrasives such as sawdust, grass clippings, street refuse and cotton pickers.

#### CONSTRUCTION

EPDM rubber, metal wire helix, smooth bore, slightly corrugated O.D.

#### TEMP. RANGE

-40°F to 220°F

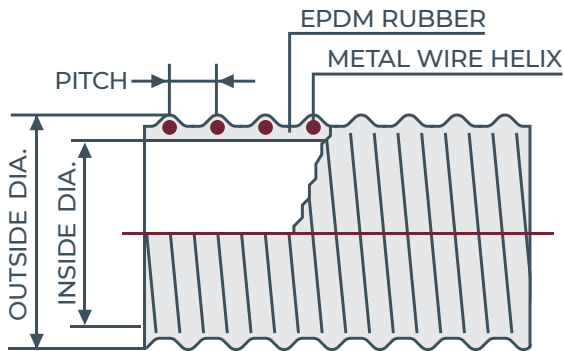

#### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
2	2.36	0.43	2.0	12	12.0	0.40	50
2-1/2	3.00	0.58	3.0	12	9.0	0.44	50
3	3.37	0.60	3.0	12	8.0	0.55	50
4	4.39	0.65	4.0	9	6.0	0.73	50
5	5.43	0.88	5.0	7	5.0	0.84	50
6	6.36	0.87	6.0	6	4.0	1.04	50
7	7.32	0.89	7.0	5	4.0	1.17	50
8	8.35	0.92	8.0	4	4.0	1.38	50
10	10.45	1.02	10.0	3	4.0	2.40	50
12	12.40	1.20	12.0	3	4.0	2.50	25

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*