




flexDUCT™ 660 (660 YD)

Heavy-duty duct hose

An exceptional solution for demanding applications. With a smooth bore for higher laminar flow, a robust “safety yellow” helix for visibility and abrasion resistance, it’s perfect for heavy-duty ducting needs like cleaning, grass and leaf collection, cement dust recovery, blast cabinet dust collection systems, and grain auger downspouts. Constructed with EPDM rubber, and a polypropylene helix.

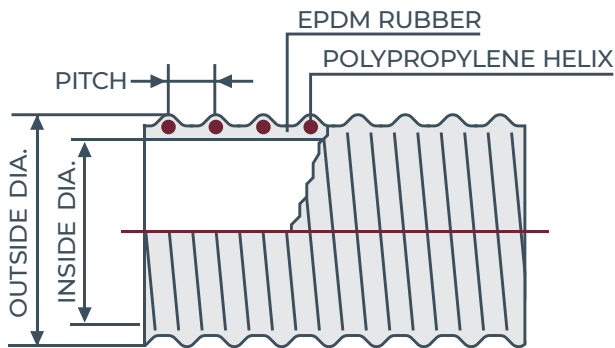

FEATURES

Smooth bore for higher laminar flow. Extra heavy-duty “safety yellow” helix for high visibility and superior external abrasion resistance for “dragging” applications. 100% rubber sidewall (no fabric).

APPLICATIONS

Heavy-duty ducting applications such as duct cleaning, commercial grass and leaf collection, cement dust recovery for floor finishing, blast cabinet dust collection systems, and grain auger downspouts

CONSTRUCTION

EPDM rubber, polypropylene helix, smooth bore, corrugated O.D.

TEMP. RANGE

-40°F to 158°F

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
4	4.57	0.67	4.0	9	6.0	0.79	50
5	5.53	0.87	5.0	7	5.0	0.83	50
6	6.57	0.82	6.0	6	4.0	1.26	50
8	8.72	0.83	8.0	4	4.0	1.92	50
10	10.83	1.06	10.0	4	4.0	2.38	25
12	12.73	1.18	12.0	3	3.0	2.65	25

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*