

flexDUCT™ U 150 (150 UDH)




Medium-duty polyurethane blower and ducting hose

A versatile solution for medium-duty applications. Lightweight, flexible, and abrasion-resistant, it is designed for various ducting and blower needs.

FEATURES

Lightweight and flexible. External helix provides for easy drag. Abrasion-resistant polyurethane and smooth bore eliminate material build-up.

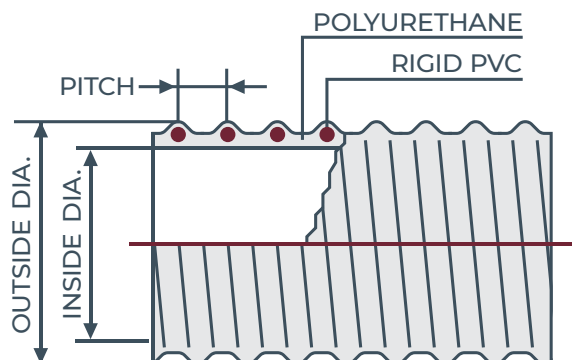

APPLICATIONS

Medium-duty ducting and blower applications. For use with light to medium weight abrasives, leaf and grass collection, cotton pickers, mulch blowing, dust and sawdust collection.

CONSTRUCTION

Flexible clear polyurethane, rigid PVC helix, smooth bore, corrugated O.D.

TEMP. RANGE

-40°F to 140°F

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
2-1/2	2.89	0.53	2.5	9	16.0	0.34	50
3	3.46	0.57	3.0	8	15.0	0.48	50
4	4.46	0.59	4.0	7	12.0	0.70	50
5	5.57	0.83	5.0	6	9.0	1.10	50
6	6.56	0.83	6.0	5	7.0	1.30	50
7	7.59	0.85	7.0	4	6.0	1.56	50
8	8.59	0.85	8.0	3	5.0	1.65	50

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*