



flexFOOD™ 210 (210 HFG)

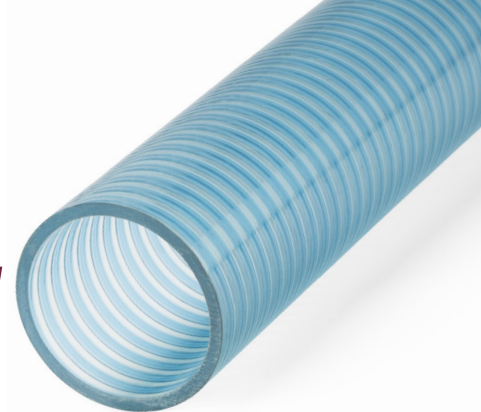

Heavy-duty food grade suction and discharge hose

Meticulously crafted to meet FDA and 3-A nontoxic standards. With a clear sidewall for visual inspection and a smooth bore ensuring precise flow and optimal drainability.

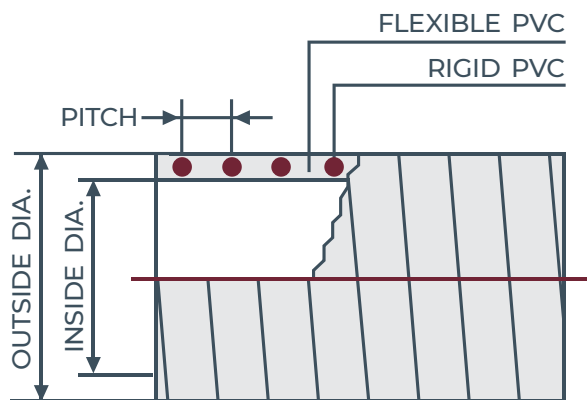

FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

A food grade suction and discharge hose can be used in food and wine processing applications as well as milk trucks.

CONSTRUCTION

Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

TEMP. RANGE

-13°F to 140°F

NOTE

Made with NSF51 approved materials

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
3/4	0.96	0.22	1.9	86	29.8	0.16	100
1	1.25	0.22	1.9	86	29.8	0.26	100
1-1/4	1.54	0.26	2.7	79	29.8	0.37	100
1-1/2	1.82	0.30	2.8	72	29.8	0.44	100
2	2.39	0.33	3.9	72	29.8	0.74	100
2-1/2	2.93	0.37	5.0	72	29.8	1.01	100
3	3.43	0.37	7.0	62	29.8	1.21	100
4	4.53	0.43	9.1	55	29.8	2.01	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*