



flexVAC™ lite 180 MVAR (180 MV)

Medium-duty abrasion resistant suction and discharge hose

A versatile solution for various applications. Lightweight and flexible, the SBR rubber hose with static carbon black ensures exceptional abrasion resistance and static dissipation. Perfect for grain and roof vacuums, featuring an external helix for easy drag and a smooth bore for precise flow.

FEATURES

The lightweight and flexible SBR rubber hose blended with static carbon black makes it extremely abrasion resistant. Static dissipating with no grounding wire. External helix provides easy drag. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions.

APPLICATIONS


Designed for numerous applications such as grain and roof vacuums.

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION

SBR rubber with carbon black, rigid PVC helix, smooth bore, corrugated O.D.

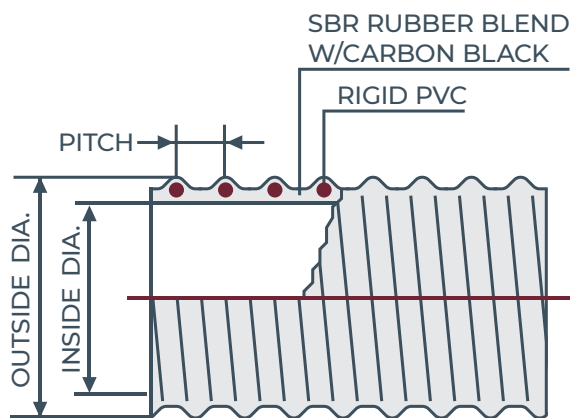

AVAILABLE SIZES

| ID (inches) | OD (inches) | Pitch (inches) | Minimum Bend Radius (72°F, inches) | Working Pressure (72°F, PSI) | Vacuum Rating (72°F, In Hg) | Weight (Lbs/Ft) | Standard Length (Ft) |
|----------------|----------------|-------------------|--|------------------------------------|-----------------------------------|--------------------|----------------------------|
| 5 | 5.75 | 0.87 | 5.0 | 8 | 18.0 | 2.00 | 50, 100 |
| 6 | 6.73 | 0.87 | 9.0 | 8 | 18.0 | 2.70 | 50, 100 |

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*