


flexVAPOR™ 120 ST (ST 120 VP)



Gasoline vapor recovery hose

A specialized solution for vapor recovery. Featuring a nitrile rubber static dissipating tube, grounding wire, and smooth bore for precise flow. External helix ensures easy drag.

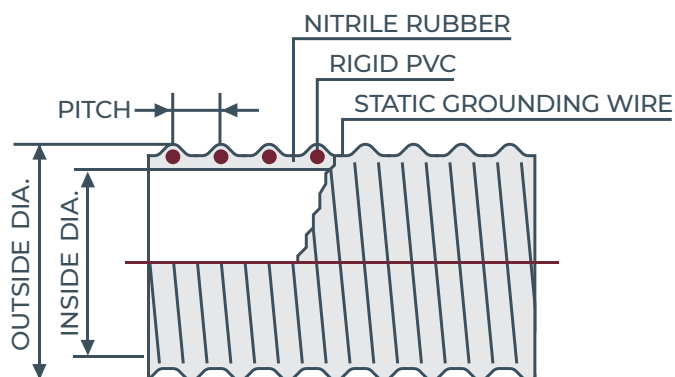

FEATURES

Nitrile rubber static dissipating tube and static grounding wire provide maximum static resistance when connected to a grounded system. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. External helix provides easy drag.

APPLICATIONS

Gasoline vapor recovery hose only

CONSTRUCTION

Nitrile rubber, rigid PVC helix, smooth bore, corrugated O.D., static grounding wire

TEMP. RANGE

-40°F to 140°F

NOTE

Static wire must be properly imbedded during fitting installation and tested to assure proper static grounding of hose to a grounded system.

AVAILABLE SIZES

| ID (inches) | OD (inches) | Pitch (inches) | Minimum Bend Radius (72°F, inches) | Working Pressure (72°F, PSI) | Vacuum Rating (72°F, in Hg) | Weight (Lbs/Ft) | Standard Length (Ft) |
|----------------|----------------|-------------------|--|------------------------------------|-----------------------------------|--------------------|----------------------------|
| 2 | 2.36 | 0.39 | 3.0 | 20 | 29.8 | 0.61 | 60,100 |
| 3 | 3.46 | 0.59 | 3.5 | 10 | 29.8 | 1.00 | 60,100 |
| 4 | 4.57 | 0.65 | 5.0 | 10 | 29.8 | 1.70 | 60,100 |

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*