

flexVAPOR™ lite U 101 (101 PS UVOR)

General vapor, water suction and discharge hose

An adaptable solution for diverse applications. Constructed with flexible PVC, it ensures durability with solid wall construction and UV inhibitors. Ideal for methane gas recovery at landfills, connecting rigid pipes, and repairing broken lines.

FEATURES

Lightweight and flexible hose constructed with flexible PVC. The solid wall construction and extra UV inhibitors provide increased durability. External helix provides for easy drag. Rated for both suction and discharge. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

General vapor hose with solid wall construction and UV inhibitors make it perfect for methane gas recovery at landfills. It can also be used in the connection of rigid pipes of the same size, and the repair of broken rigid lines.

CONSTRUCTION


Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

TEMP. RANGE

-13°F to 140°F

NOTE

Not a food-grade hose

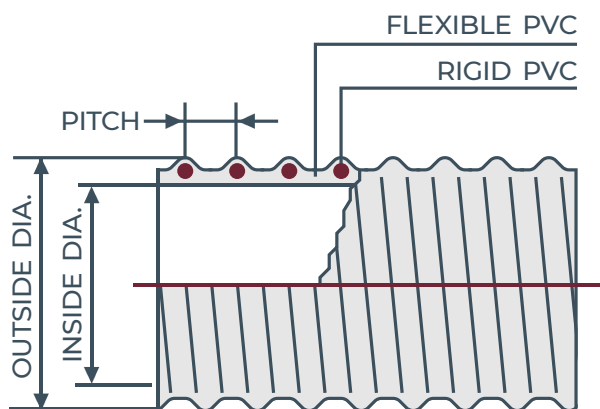

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
2.375	2.76	0.41	3.5	35	29.8	0.64	100
3-1/2	4.02	0.63	7.0	30	29.8	1.10	100
4-1/2	5.08	0.67	9.0	30	28.0	1.70	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*