



## flexFLO™ 114 (114 CL/114 GR)

### Lightweight water suction and discharge hose

An ideal solution for various agricultural applications such as air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Lightweight, flexible, and featuring a clear sidewall for visual inspection, it ensures precise flow and optimal drainability.

#### FEATURES

Lightweight and flexible water and suction hose. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

#### APPLICATIONS

Economical water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications.

#### TEMP. RANGE


-13°F to 140°F

#### CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

#### NOTE

Not a food-grade hose

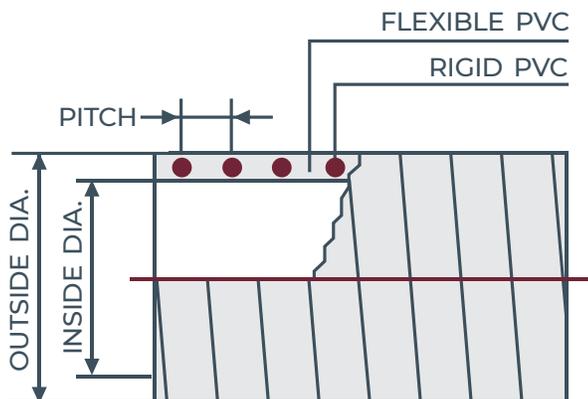

#### AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1-1/4	1.44	0.26	3.0	65.0	29.8	0.23	100
1-1/2	1.69	0.30	4.0	65.0	29.8	0.28	100
2	2.24	0.33	5.0	60.0	29.8	0.46	100
2-1/2	2.80	0.37	6.0	60.0	29.8	0.66	100
3	3.31	0.37	8.0	50.0	29.8	0.81	100
4	4.39	0.43	10.0	45.0	29.8	1.43	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*