




flexFLO™ HD 100 FF (FF 100 HD)

Heavy-duty drafting hose for rural fire protection.

Provides reliable drafting performance when accessing water from ponds, lakes, streams, cisterns, portable tanks, and other static water sources. Constructed with cold-weather PVC and a reinforced oversized helix, this lightweight corrugated PVC hose delivers the vacuum resistance required for drafting while remaining easier to handle than traditional hard suction hose.

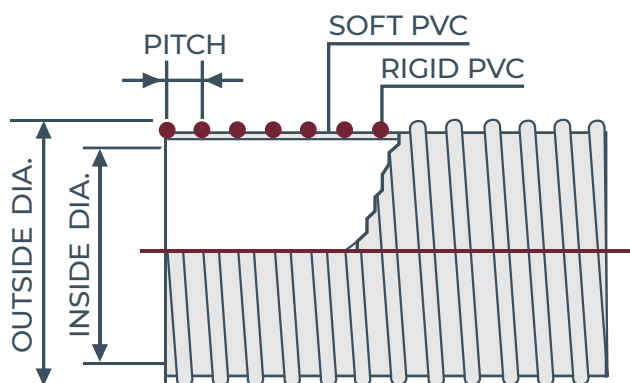

FEATURES

Lightweight and flexible hose constructed with cold weather PVC, making it perfect for the most demanding cold conditions. External helix provides for easy drag. Helix is 30% larger than flexFLO™ lite 100 CW. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

APPLICATIONS

Dewatering, water suction

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION

Cold weather PVC, rigid and enlarged PVC helix, smooth bore, corrugated O.D.

ACCESSORIES

Banding coil, Powerlock clamp

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
6	6.67	0.78	9.0	20.0	28.0	3.58	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*