


flexDUCT™ 150 (150 CL)



Lightweight blower and ducting hose

A versatile solution for light-duty applications. Flexible and lightweight, it features an external helix for easy drag and a smooth bore for precise flow. Ideal for general ducting needs, including ventilation, handling grass clippings, leaves, dust, and fumes.

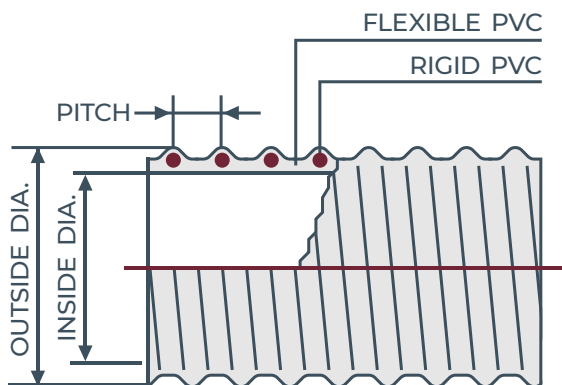

FEATURES

Flexible and lightweight. External helix provides easy drag. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions.

APPLICATIONS

Light-duty general ducting for ventilation and grass clippings, leaves, dust and fumes.

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

TEMP. RANGE

-13°F to 140°F

NOTE

Not a food-grade hose.

Minimum Runs:

7" ID - 700 ft min. run or 300 ft at 4 week lead time

AVAILABLE SIZES

ID in / mm	OD in / mm	Pitch in / mm	Minimum Bend Radius in / mm	Working Pressure PSI / bar	Vacuum Rating inHg / kPa	Weight lb/ft / kg/m	Standard Length ft / m
2-1/2 / 63.5	2.81 / 71.4	0.55 / 14.0	2.5 / 64	6 / .41	—	0.37 / .55	50, 100 / 15.2, 30.5
3 / 76.2	3.37 / 85.6	0.59 / 15.0	3.0 / 76	6 / .41	—	0.54 / .80	50, 100 / 15.2, 30.5
4 / 101.6	4.41 / 112.0	0.61 / 15.5	4.0 / 102	5 / .34	—	0.71 / 1.06	50, 100 / 15.2, 30.5
5 / 127.0	5.55 / 141.0	0.80 / 20.3	5.0 / 127	3 / .21	—	1.00 / 1.49	50, 100 / 15.2, 30.5
6 / 152.4	6.51 / 165.4	0.80 / 20.3	6.0 / 152	3 / .21	—	1.29 / 1.92	50, 100 / 15.2, 30.5
7 / 177.8	7.54 / 191.5	0.85 / 21.6	7.0 / 178	2 / .14	—	1.38 / 2.05	50, 100 / 15.2, 30.5
8 / 203.2	8.55 / 217.2	0.85 / 21.6	8.0 / 203	2 / .14	—	1.71 / 2.54	50 / 15.2

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*