


flexFOOD™ lite 200 (200 SFG)



Food grade suction and discharge hose

Meticulously crafted to meet FDA and 3-A nontoxic standards. With a clear sidewall for visual inspection and a smooth bore ensuring precise flow and optimal drainability.

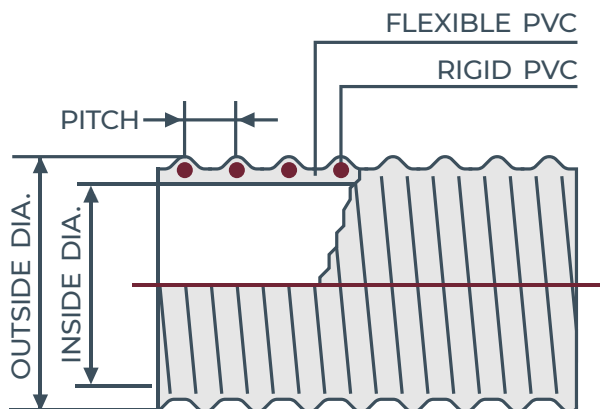

FEATURES

The food grade hose is constructed in compliance with FDA and 3-A nontoxic specifications. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

Food grade suction hose for use in canning, dairy and bottling.

CONSTRUCTION

Produced entirely of compounds in compliance with FDA and 3-A non toxic specifications, flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

TEMP. RANGE

-13°F to 140°F

NOTE

Made with NSF51 approved materials
Minimum Runs:

4" ID - 600 ft min. run or 300 ft, 4 week lead time

AVAILABLE SIZES

ID in / mm	OD in / mm	Pitch in / mm	Minimum Bend Radius in / mm	Working Pressure PSI / bar	Vacuum Rating inHg / kPa	Weight lb/ft / kg/m	Standard Length ft / m
1 / 25.4	1.25 / 31.8	0.30 / 7.6	1.5 / 38	50 / 3.45	29.8 / 100.9	0.18 / 0.27	100 / 30.5
1-1/4 / 31.8	1.52 / 38.6	0.33 / 8.4	2.0 / 51	45 / 3.1	29.8 / 100.9	0.22 / 0.33	100 / 30.5
1-1/2 / 38.1	1.81 / 46	0.35 / 8.9	2.5 / 64	45 / 3.1	29.8 / 100.9	0.35 / 0.52	100 / 30.5
2 / 50.8	2.36 / 59.9	0.39 / 9.9	4.0 / 102	40 / 2.76	29.8 / 100.9	0.50 / 0.74	100 / 30.5
2-1/2 / 63.5	2.87 / 72.9	0.56 / 14.2	4.5 / 114	35 / 2.41	29.8 / 100.9	0.68 / 1.01	100 / 30.5
3 / 76.2	3.50 / 88.9	0.59 / 15	6.0 / 152	35 / 2.41	29.8 / 100.9	1.00 / 1.49	100 / 30.5
4 / 101.6	4.63 / 117.6	0.65 / 16.5	8.0 / 203	30 / 2.07	29.8 / 100.9	1.52 / 2.26	100 / 30.5

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*