


flexVAC™ lite 180 AR (180 BL)



Lightweight abrasion resistant blower and suction hose

A versatile solution for suction and light blowing of lightweight abrasives. Its SBR rubber blend with static carbon black ensures exceptional abrasion resistance and static dissipation. Ideal for materials like rockwool, fiberglass, sawdust, grain, insulation, and cement dust.

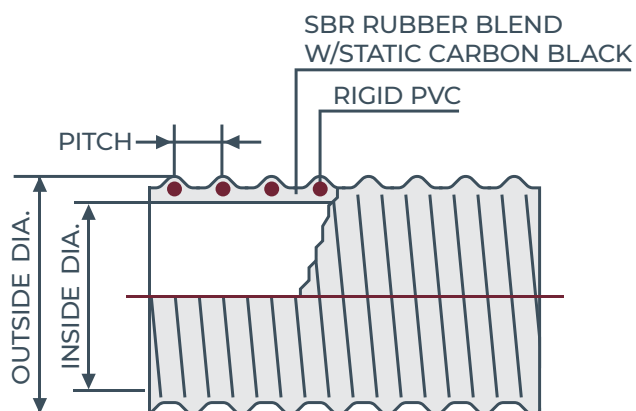

FEATURES

The lightweight and flexible SBR rubber hose blended with static carbon black makes it extremely abrasion resistant. Static dissipating with no grounding wire. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions.

APPLICATIONS

Designed for suction and light blowing of lightweight abrasives such as rockwool, fiberglass, sawdust, grain, insulation and cement dust.

TEMP. RANGE

-40°F to 140°F

CONSTRUCTION

SBR rubber blended with static carbon black, rigid PVC helix, smooth bore, corrugated O.D.

AVAILABLE SIZES

ID in / mm	OD in / mm	Pitch in / mm	Minimum Bend Radius in / mm	Working Pressure PSI / bar	Vacuum Rating inHg / kPa	Weight lb/ft / kg/m	Standard Length ft / m
2-1/2 / 63.5	2.91 / 73.9	0.56 / 14.2	2.5 / 64	18 / 1.24	25.0 / 84.7	0.71 / 1.06	100 / 30.5
3 / 76.2	3.44 / 87.4	0.59 / 15	3.0 / 76	13 / 0.9	23.0 / 77.9	0.92 / 1.37	100 / 30.5
4 / 101.6	4.53 / 115.1	0.65 / 16.5	4.0 / 102	10 / 0.69	20.0 / 67.7	1.50 / 2.23	50,100 / 15.2, 30.5
5 / 127	5.63 / 143	0.87 / 22.1	5.0 / 127	8 / 0.55	15.0 / 50.8	1.68 / 2.5	50,100 / 15.2, 30.5
6 / 152.4	6.67 / 169.4	0.87 / 22.1	9.0 / 229	8 / 0.55	15.0 / 50.8	2.40 / 3.57	50,100 / 15.2, 30.5
7 / 177.8	8.71 / 221.2	0.87 / 22.1	10.0 / 254	8 / 0.55	15.0 / 50.8	3.00 / 4.46	50 / 15.2
8 / 203.2	8.98 / 228.1	0.91 / 23.1	12.0 / 305	8 / 0.55	15.0 / 50.8	4.40 / 6.55	50 / 15.2

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*