




flexFOOD™ 215 CB (KRCB)

Clear, flexible PVC food and beverage hose

A food-grade suction and discharge hose designed for versatile use across construction, industrial, and agricultural applications, including food, beverage dispensing, and air and water lines.

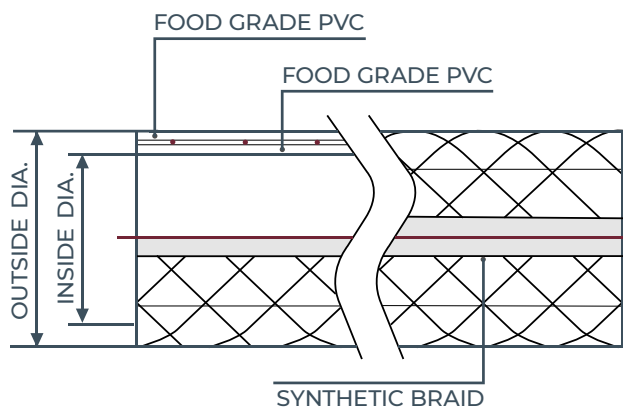

FEATURES

This hose is made from FDA, 3A, and NSF-approved clear PVC for safe food contact and is NSF-51 compliant for food equipment use. Reinforced with high-strength yarn for durability, it offers flexibility, easy handling, and a smooth interior for efficient flow and cleaning. The lightweight design resists kinking, crushing, and collapse, while the transparent wall allows quick visual inspection.

APPLICATIONS

Food and beverage transfer

CONSTRUCTION

Produced entirely of compounds in compliance with FDA, 3-A nontoxic and NSF specifications, flexible PVC, synthetic braiding, smooth bore, smooth O.D.

TEMP. RANGE

-13°F to 140°F

AVAILABLE SIZES

ID (inches)	OD (inches)	Working Pressure (72°F, PSI)	Weight (Lbs/Ft)	Standard Length (Ft)
3/16	0.421	250	0.054	300
1/4	0.458	250	0.061	300
5/16	0.528	250	0.079	300
3/8	0.626	230	0.100	300
1/2	0.752	220	0.126	300
5/8	0.917	210	0.183	200
3/4	1.028	160	0.210	200
1	1.319	125	0.305	200
1-1/4	1.625	100	0.465	100
1-1/2	1.937	100	0.620	100
2	2.490	75	0.940	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*