Kanaflex®
The Original Flexible Hose




flexFlo™ Spa (SPA WHITE)

Flexible PVC spa hose

A versatile solution for spa applications. Flexible, lightweight, and featuring a smooth bore for precise flow and efficient drainability. Compatible with PVC solvent weld fittings only.

FEATURES
Flexible and lightweight. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

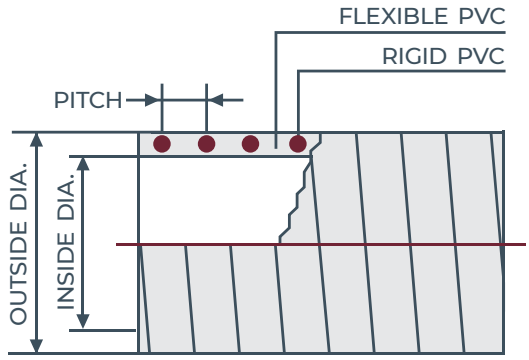

APPLICATIONS
Water lines, air lines, pump lines

CONSTRUCTION
Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

TEMP. RANGE
-13°F to 158°F

ACCESSORIES
For use with PVC solvent weld fittings only.

NOTE
Not a food-grade hose. For use with PVC solvent weld fittings only. Inside diameter is nominal.

Tolerance on outside diameter is + .020, - .005
See usage/storage suggestions and warranty information before use.

This not a stocked item. Made to order only.

AVAILABLE SIZES

ID in / mm	OD in / mm	Pitch in / mm	Minimum Bend Radius in / mm	Working Pressure PSI / bar	Vacuum Rating inHg / kPa	Weight lb/ft / kg/m	Standard Length ft / m
1/2 / 12.7	0.840 / 21.3	0.22 / 5.6	3.0 / 76	100 / 6.89	29.8 / 100.9	0.16 / 0.24	50, 100 / 15.2, 30.5
3/4 / 19	1.050 / 26.7	0.22 / 5.6	3.0 / 76	100 / 6.89	29.8 / 100.9	0.23 / 0.34	50, 100 / 15.2, 30.5
1 / 25.4	1.315 / 33.4	0.28 / 7.1	3.0 / 76	100 / 6.89	29.8 / 100.9	0.32 / 0.48	50, 100 / 15.2, 30.5
1-1/4 / 31.8	1.660 / 42.2	0.30 / 7.6	4.0 / 102	80 / 5.52	29.8 / 100.9	0.37 / 0.55	50, 100 / 15.2, 30.5
1-1/2 / 38.1	1.900 / 48.3	0.30 / 7.6	4.0 / 102	65 / 4.48	29.8 / 100.9	0.50 / 0.74	50, 100 / 15.2, 30.5
2 / 50.8	2.375 / 60.3	0.34 / 8.6	5.0 / 127	60 / 4.14	29.8 / 100.9	0.65 / 0.97	50, 100 / 15.2, 30.5

Like other materials, Spa Hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them. Spa Hose should not be used underground in areas infested by termites.